




SPECTRUM

WELDING SUPPLIES

HIRE • SALES • REPAIR • REFURBISH

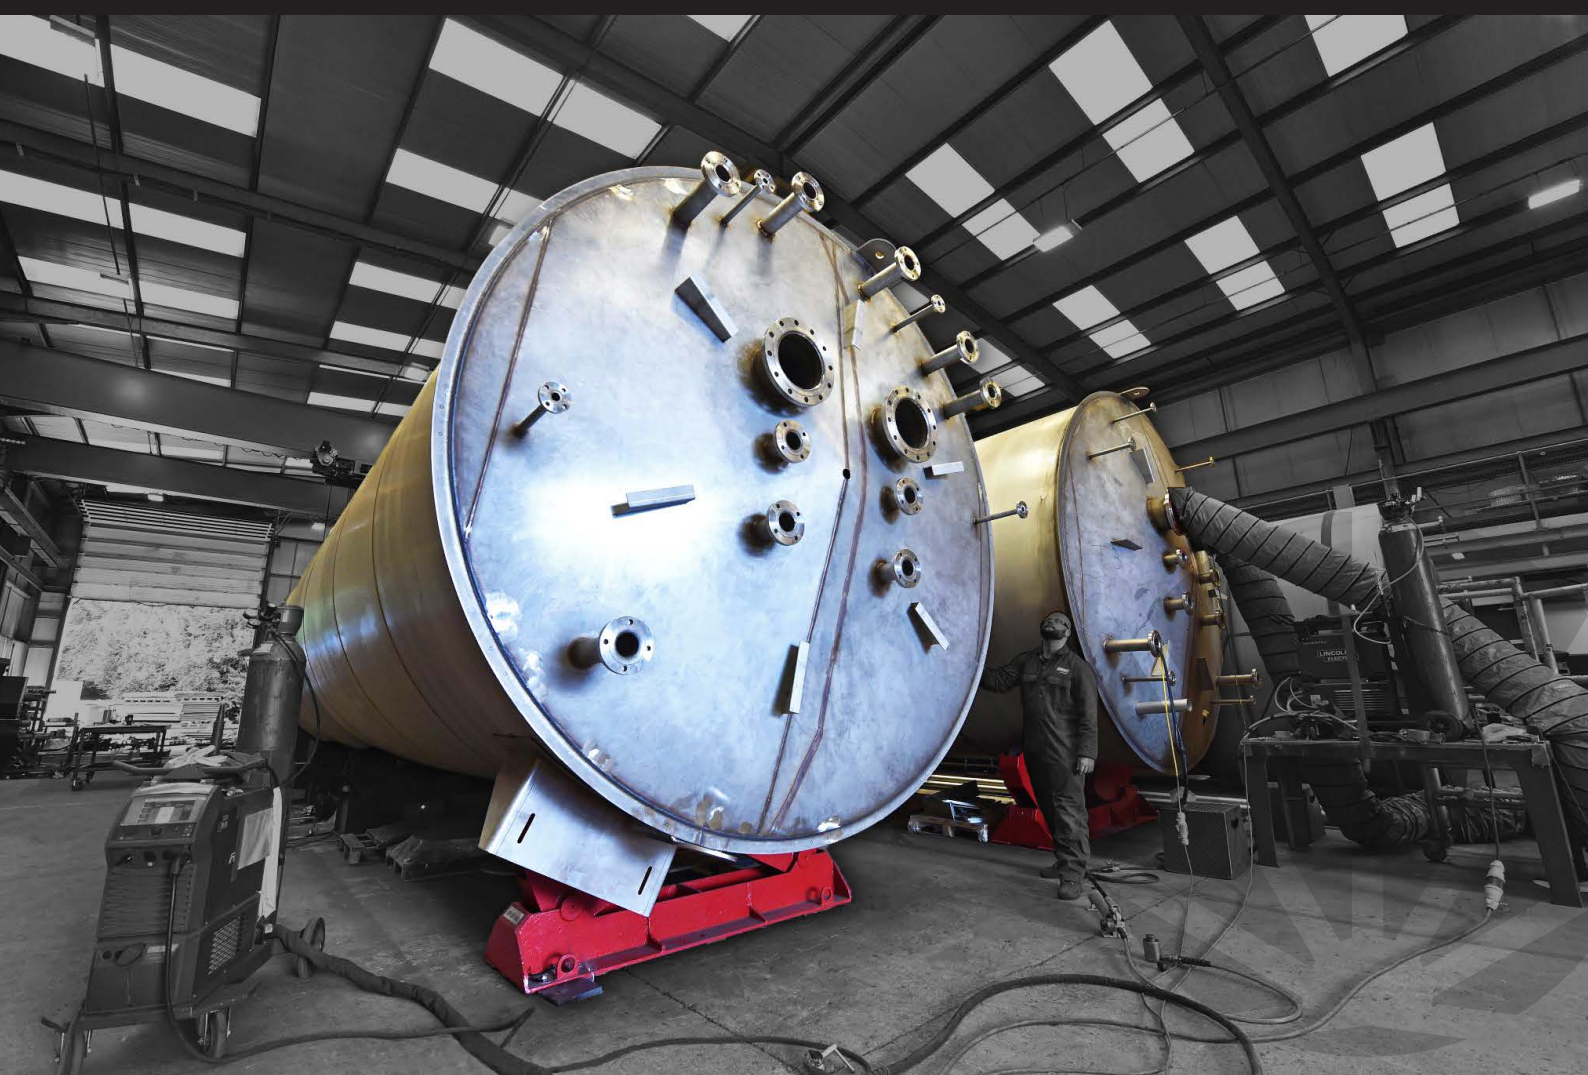

BODE SAR 200



10 TONNE CAPACITY



415V



570mm



4600mm

T 01246 205 267

E info@spectrumweldingsupplies.co.uk

W spectrumweldingsupplies.co.uk



BODE SAR 200

SINGLE
WHEEL WIDTH

Model	SAR 200 10 tonne (single width wheel)
Supply	415V <i>Please confirm 3-phase 32amp 4 or 5 pin plug before order</i>
Controls	Handheld pendant controller 10mtr cable (forward / reverse / stop / variable speed)
Rotation Speed Range	Variable speed from 130mm p/min to 1300mm per minute
Drive 'Turning' Capacity	10 Tonnes
Set (x1 Drive & x1 Idler Unit) Load Capacity	10 Tonnes
Idler Rotator Load Capacity	5 Tonnes
Drive Rotator Load Capacity	5 Tonnes
Minimum Overall Diameter SWL	450mm
Maximum Overall Diameter SWL	4600mm
Minimum height rotators will raise cylinder off the ground (minimum wheel centres)	400mm
Maximum height rotators will raise cylinder off the ground (maximum wheel centres)	600mm
Wheel Overall Diameter	381mm
Wheel Tyre Width	127mm x4 points per unit (8x 127mm tyre points of contact per drive & idler set)
Wheel Material	Rubber

Idler Unit Length	2010mm
Idler Unit Width	540mm
Idler Height	871mm
Idler Unit Weight	500kg

Drive Unit Length	3524mm
Drive Unit Width	770mm
Idler Height	871mm
Drive Unit Weight	900kg

Symbols

-  Load capacity
-  Supply voltage
-  Minimum overall diameter (mm)
-  Maximum overall diameter (mm)





Spectrum Welding Supplies Ltd, Spectrum House,
McGregor's Way, Chesterfield, Derbyshire, S40 2WB

Registered Office: Spectrum House, McGregor's Way,
Chesterfield, Derbyshire, S40 2WB

Registered in England and Wales Company Registration No. 1732286

Vat Registration No. 401 5037 11